

Concealed ceiling unit with medium ESP


FWP-AT



BLDC fan motor unit for horizontal concealed mounting.
Continuous air flow regulation and fan speed modulation

- › Blends unobtrusively with any interior décor: only the suction and discharge grills are visible
- › Up to 50% energy savings with brushless DC motor technology compared to traditional technology
- › Instant adjustment to temperature and relative humidity changes
- › Low operating sound level
- › Highly flexible solutions: multiple sizes, piping topologies and connection valves
- › Available static pressure up to 70 Pa


FWP-AT

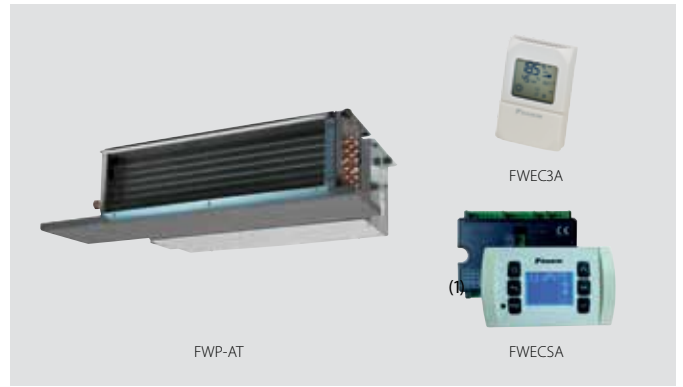

FWP-AT				02	03	04	05	06	07
				2-pipe					
Cooling capacity (standard conditions)	Latent capacity	Fan speed 7	kW	0.67(1)	0.92(1)	1.06(1)	1.35(1)	1.41(1)	1.87(1)
		Fan speed 1	kW	0.95(1) / 1.35(1)	1.03(1) / 1.51(1)	1.11(1) / 1.69(1)	1.62(1) / 2.23(1)	1.79(1) / 2.58(1)	1.92(1) / 2.86(1)
	Sensible capacity / Total capacity	Fan speed 2	kW	1.02(1) / 1.38(1)	1.17(1) / 1.70(1)	1.23(1) / 1.83(1)	1.82(1) / 2.52(1)	1.88(1) / 2.55(1)	2.15(1) / 3.15(1)
		Fan speed 3	kW	1.10(1) / 1.50(1)	1.25(1) / 1.83(1)	1.32(1) / 1.97(1)	2.20(1) / 3.07(1)	2.22(1) / 2.97(1)	2.55(1) / 3.75(1)
		Fan speed 4	kW	1.29(1) / 1.77(1)	1.47(1) / 2.14(1)	1.56(1) / 2.33(1)	2.69(1) / 3.79(1)	2.79(1) / 3.87(1)	3.19(1) / 4.71(1)
		Fan speed 5	kW	1.41(1) / 1.95(1)	1.61(1) / 2.35(1)	1.72(1) / 2.57(1)	2.82(1) / 3.97(1)	2.94(1) / 4.10(1)	3.36(1) / 4.96(1)
		Fan speed 6	kW	1.53(1) / 2.12(1)	1.85(1) / 2.70(1)	1.99(1) / 2.98(1)	2.91(1) / 4.11(1)	3.06(1) / 4.28(1)	3.49(1) / 5.15(1)
		Fan speed 7	kW	1.71(1) / 2.38(1)	1.96(1) / 2.88(1)	2.13(1) / 3.19(1)	3.23(1) / 4.58(1)	3.44(1) / 4.85(1)	3.93(1) / 5.80(1)
Heating capacity (standard conditions)	Capacity	Fan speed 1	kW	1.40(2)	1.48(2)	1.53(2)	2.46(2)	2.59(2)	2.74(2)
		Fan speed 2	kW	1.56(2)	1.67(2)	1.74(2)	2.71(2)	2.96(2)	3.12(2)
		Fan speed 3	kW	1.68(2)	1.80(2)	1.88(2)	3.23(2)	3.45(2)	3.64(2)
		Fan speed 4	kW	1.93(2)	2.08(2)	2.19(2)	3.93(2)	4.25(2)	4.53(2)
		Fan speed 5	kW	2.11(2)	2.29(2)	2.42(2)	4.10(2)	4.45(2)	4.76(2)
		Fan speed 6	kW	2.27(2)	2.62(2)	2.80(2)	4.24(2)	4.61(2)	4.95(2)
		Fan speed 7	kW	2.54(2)	2.80(2)	3.00(2)	4.71(2)	5.15(2)	5.56(2)
		Power input	Fan speed 1	kW		0.01			0.02
Fan speed 2	kW			0.01			0.02		
Fan speed 3	kW			0.02			0.03		
Fan speed 4	kW			0.02			0.05		
Fan speed 5	kW			0.03			0.05		
Fan speed 6	kW			0.033			0.065		
Fan speed 7	kW			0.046			0.076		
FCEER							A		
FCCOP							A		
Dimensions	Unit	Height x Width x Depth	mm	551 x 1,040 x 239			551 x 1,390 x 239		
Weight	Unit		kg	26.0	27.0	29.0	35.0	37.0	39.0
Heat exchanger	Water volume		l	1	2				3
Water flow	Cooling/Heating	Fan speed 1	l/h	219 / 242	256 / 256	283 / 265	318 / 372	400 / 448	465 / 469
		Fan speed 2	l/h	238 / 272	294 / 290	316 / 302	436 / 472	440 / 515	544 / 542
		Fan speed 3	l/h	259 / 292	318 / 313	342 / 327	533 / 562	516 / 600	649 / 634
		Fan speed 4	l/h	307 / 335	372 / 362	403 / 381	659 / 684	647 / 739	817 / 789
		Fan speed 5	l/h	340 / 367	410 / 399	448 / 422	690 / 713	712 / 774	859 / 828
		Fan speed 6	l/h	369 / 395	471 / 456	519 / 487	715 / 738	744 / 802	894 / 860
		Fan speed 7	l/h	418 / 442	502 / 486	555 / 521	799 / 819	847 / 898	1,009 / 969
		Fan	Type	Centrifugal					
Quantity	1				2				
Air flow rate	Fan speed 1		m ³ /h	184		283		331	
	Fan speed 2		m ³ /h	210		371		385	
	Fan speed 3		m ³ /h	228		455			
	Fan speed 4		m ³ /h	267		576			
	Fan speed 5		m ³ /h	297		607			
	Fan speed 6		m ³ /h	324	345		633		
	Fan speed 7	m ³ /h	371		722				
	Air filter	Type	Acrylic fiber - Filtering class G2 (G3 on request)						
Total sound power level /	Fan speed 1	dBA	36(1) / 31 (2)			38(1) / 33 (2)		39 (3) / 34 (4)	
	Fan speed 2	dBA	40 (3) / 35 (4)					43 (3) / 38 (4)	
Sound pressure level	Fan speed 3	dBA	43 (3) / 38 (4)					47 (3) / 42 (4)	
	Fan speed 4	dBA	46 (3) / 41 (4)					52 (3) / 47 (4)	
	Fan speed 5	dBA	50 (3) / 45 (4)					54 (3) / 49 (4)	
	Fan speed 6	dBA	52 (3) / 47 (4)					56 (3) / 51 (4)	
	Fan speed 7	dBA	58 (3) / 53 (4)					60 (3) / 55 (4)	
Electric heater	Power input	kW	2.0				2.5		
Piping connections	Drain	OD	mm						17
Power supply	Phase/Frequency	Hz/V	1~/50						

(1) Cooling: indoor temp. 27°CDB, 19°CWB; entering water temp. 7°C, water temperature rise 5K. (2) Heating: indoor temp. 20°CDB, 15°CWB; entering water temp. 45°C, water temperature drop 5K. (3) Sound power level according to ISO3741 (4) The sound pressure level is measured via a microphone at 1m distance of the unit.

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)



ECPEN17-489

05/17



Daikin Europe N.V. participates in the Eurovent Certification programme for Liquid Chilling Packages (LCP), Air handling units (AHU), Fan coil units (FCU) and variable refrigerant flow systems (VRF) Check ongoing validity of certificate online: www.eurovent-certification.com or using: www.certiflash.com



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.